



Whirlybird®

Turbine Ventilators



BEB-12/BEB-14

foreverguarantee

The Quality & Performance of the Lomanco® Whirlybird® Turbine is Guaranteed Forever

AVAILABLE COLORS - B SERIES



BIB-12/BIB-14

COMMON FEATURES:

- Reduces energy bills.
- Easy installation.
- Forever Guarantee - residential use only.
- Permanently lubricated upper and lower ball bearings that ensure long life and no maintenance.
- All-aluminum rust-free construction.
- Rigid spider-type structure.
- Riveted at every connection.
- 21 air-foil curved vanes with rolled edges to deflect water.
- Exclusive vari-pitch base adjusts to 12/12 roof pitch.†
- Large flashing for easy installation.
- Tested to withstand winds of 110 m.p.h.
- Reduces winter ice build up.
- Big Whirly - 14" moves up to 37% more air than the 12".

All B Series Turbines



How many Whirlybird® Vents do you need?

ATTIC FLOOR SPACE IN SQ. FT.:	1000										1500										2000										2500										3000										3500									
	Intake										Intake										Intake										Intake										Intake										Intake									
EXHAUST SYSTEM	Exhaust	C416	C616	C816	10S/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	10S/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	10S/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	10S/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	10S/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	10S/190	140	SV-10	DA-4/IV-9												
12" Turbines	2	21	15	8	8	6	9	15	2	21	15	8	8	6	9	15	3	32	22	12	11	9	13	22	4	42	29	16	15	12	17	29	4	42	29	16	15	12	17	29	5	52	36	20	18	15	21	36												
14" Turbines	1	14	10	6	5	4	6	10	2	28	19	11	10	8	11	20	2	28	19	11	10	8	11	20	3	42	29	16	15	12	17	29	3	42	29	16	15	12	17	29	4	56	38	22	20	16	22	39												

Model	Hole Size (in.)	Height (in.)	Base (in.)
BIB-12*	12	17¼	20 x 20
BEB-12*	12	17¾	20 x 20
BIB-12TR*	12	20¼	20 x 20
BEB-12TR*	12	20¾	20 x 20
BIB-14*	14	20	22 x 22
BEB-14*	14	20¾	22 x 22
GT-12	12	15¾	20 x 20
GEB-12	12	16	20 x 20

Hurricane Caps Available




GEB-12 & GT-12(shown)
GALVANIZED STEEL TURBINE
†ADJUSTS TO 7/12 ROOF PITCH
AVAILABLE IN MILL ONLY

BEARING FACTS

Molded and fully machined raceways - not merely molded. Concentric to .0015 for low drag and quiet operation.

DuPont Delrin® inner and outer bearing rings - the longest lasting and smoothest polymer ball bearing material available.

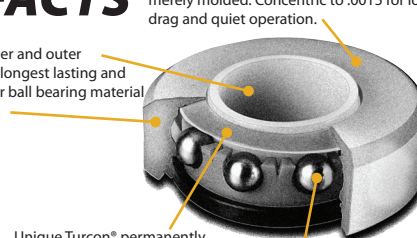

Unique Turcon® permanently seals lubricant in and dirt and moisture out.

100 Grade 302 series stainless steel balls for low turning resistance and high resistance to moisture.