




Lo-OmniRoll®

The Rollable, Gunnable and Functional Ridge Vent.

Use with Lomanco intake vents for a complete ROOF VENTILATION SYSTEM!

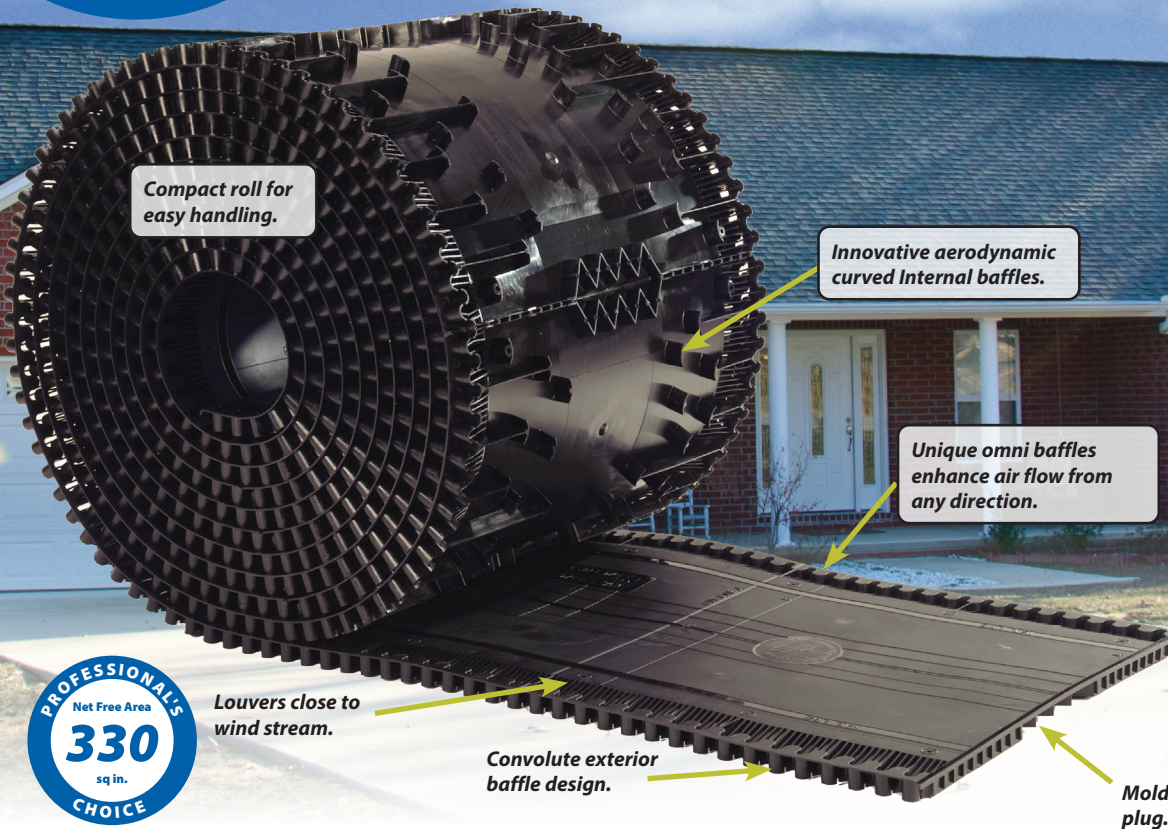

LOR-30 FEATURES:

- Pneumatic nail gun or hammer installed.
- Two coils of 1¾" nails provided.
- Patented design brings you the truly functional roll out.
- Compact 30-foot roll is easy to handle.
- Superior weather protection and performance with no filter to clog.
- Exterior convolute baffles - incurved design allows flexibility to roll up and out while maintaining its shape.
- Can be cut at one foot intervals - multiple cut lines eliminates unnecessary scrap.
- Patented molded fanfold end plugs - no accessories or alterations needed.
- Molded centerline for fast and easy alignment.
- Field tested design - proven effective under all weather conditions.
- The air flow acceleration design - maximizes ventilation capacity.
- Omni baffles signify air flow from any direction.
- Supported nail holes will not crush.
- Full 11 square inches of net free area per linear foot.
- Engineered material guarantees longevity.
- **Lifetime Limited Warranty.**



Model	Length (ft.)	NFA (in. ²)	Roof Pitch
LOR-30	30'	330	2/12 to 16/12

How many LOR-30 vents do you need?

ATTIC FLOOR SPACE IN SQ. FT.	1000											1500											2000											2500											3000											3500										
	Intake											Intake											Intake											Intake											Intake											Intake										
EXHAUST SYSTEM	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4/IV-9										
LOR-30	22'	10	7	4	4	3	4	7	33'	15	10	6	6	5	6	11	44'	20	14	8	7	6	8	14	55'	25	17	10	9	7	10	17	66'	30	20	12	11	9	12	21	77'	34	23	14	12	10	14	24																		